

- NOTES:
1. ALUMINUM ASSOCIATION STANDARD TOLERANCES APPLY UNLESS OTHERWISE SPECIFIED
  2. 6063-T5
  3. POWDER COATED
  4. AAMA 2604
  5. SOLID POWDER AVG. COATING THICKNESS SHALL BE 20-25 MILS
  6. STF POWDER AVG. COATING THICKNESS SHALL BE 35-40 MILS
  7. DIMENSIONS SHOWN APPLY BEFORE POWDER COATING

B-2X6

DIE NUMBER

---

DRAWING NUMBER

ID =XXXX



**PARALLEL**  
ARCHITECTURAL PRODUCTS



FGM - Parallel LLC

CUSTOMER NAME

2X6 SELF MATING BATTEN

DATE 02-18-2024

TYP WALL UDS: .0550

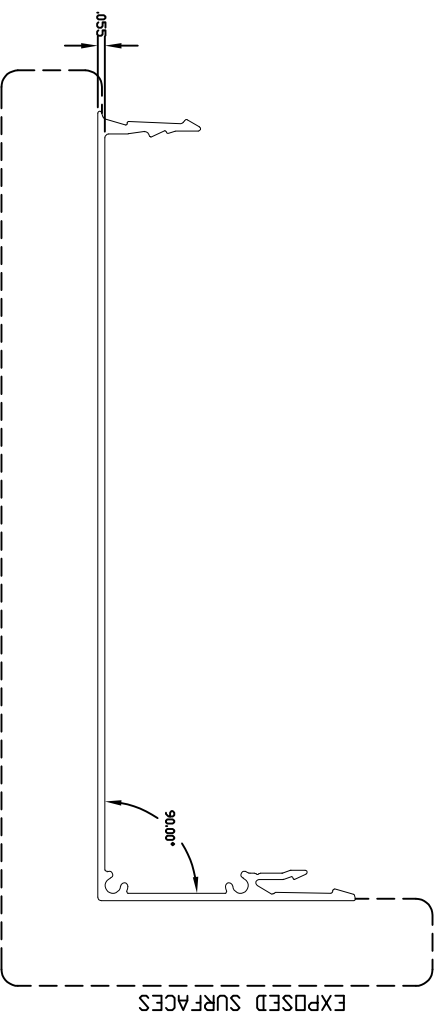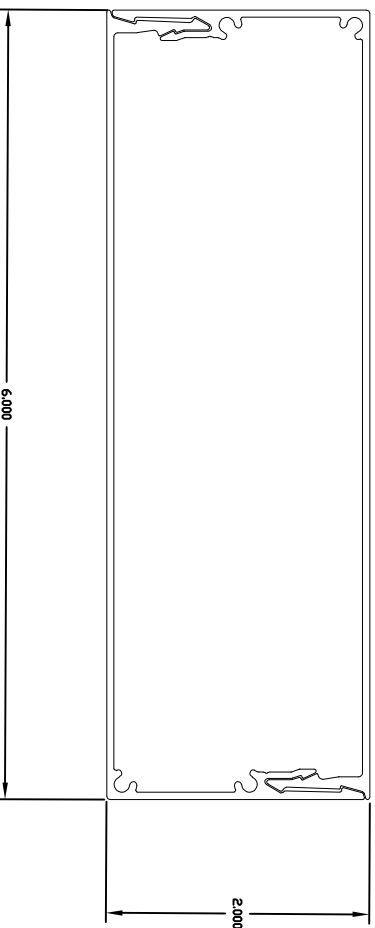

B-2X6	DIE NUMBER	---
---	DRAWING NUMBER	---
LB/FT	0.6361	
AREA	0.5437	
PERI	18.7515	
ADJ PERI	----	
COIFAC	X	X
TYPE	SOLID	
TIE VOL	----	
DRN BY	KGM	
DIE SIZE	---	
FD PLT	----	
BACKER	XXXX	
BOLSTER	X	
SUB BDL	X	
HOLES	X	
BILIR/R	X	X

REV	A	XXX
-----	---	-----

**2x6 Self Mating Batten**  
Part Drawing 2025