

- NOTES:
1. ALUMINUM ASSOCIATION STANDARD TOLERANCES APPLY UNLESS OTHERWISE SPECIFIED
 2. 6063-T5 POWDER COATED
 3. POWDER COATED
 4. AAMA 2604
 5. SOLID POWDER AVG. COATING THICKNESS SHALL BE 20-25 MILS
 6. STF POWDER AVG. COATING THICKNESS SHALL BE 35-40 MILS
 7. DIMENSIONS SHOWN APPLY BEFORE POWDER COATING

B-2X8

DIE NUMBER

DRAWING NUMBER

ID =XXXX



PARALLEL
ARCHITECTURAL PRODUCTS



FGM - Parallel LLC

CUSTOMER NAME

2X8 SELF MATING BATTEN

DATE 02-18-2024

TYP WALL U.D.S.: .0550

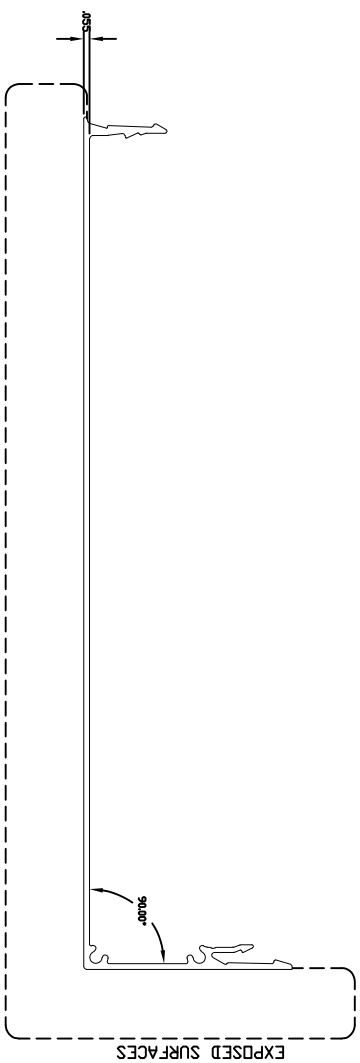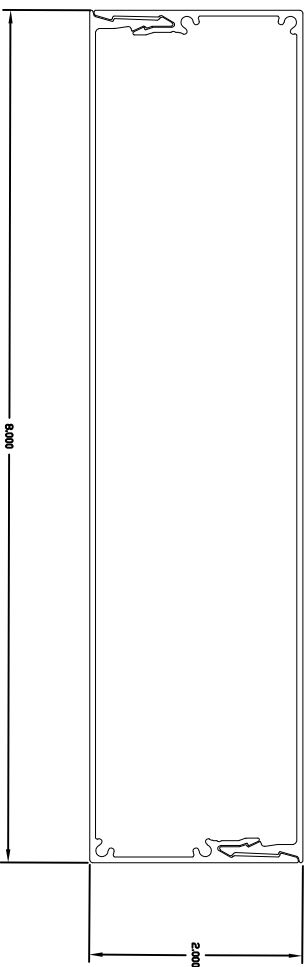

B-2X8

DIE NUMBER

DRAWING NUMBER

LB/FT 0.7650

AREA 0.6539

PERI 22.7515

ADJ PERI ----

CCIFAC X X

TYPE SOLID

TIE VOL ----

DRN BY KGM

DIE SIZE ---

FD PLT ----

BACKER XXXX

BOLSTER X

SUB BOL X

HOLEX X

BILR/R X X

REV A XXX

2x8 Self Mating Batten
Part Drawing 2025